


REV	DESCRIPTION	DATE

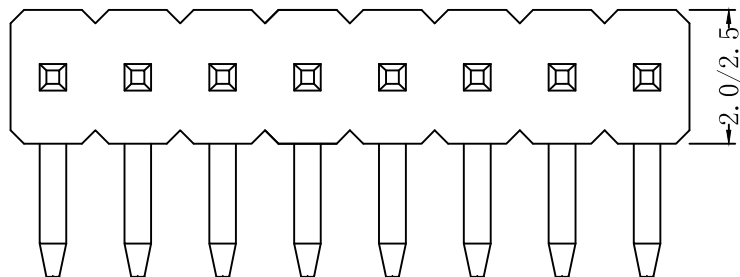



D Type

SPECIFICATIONS


Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

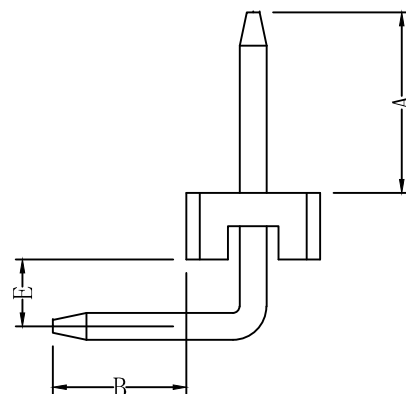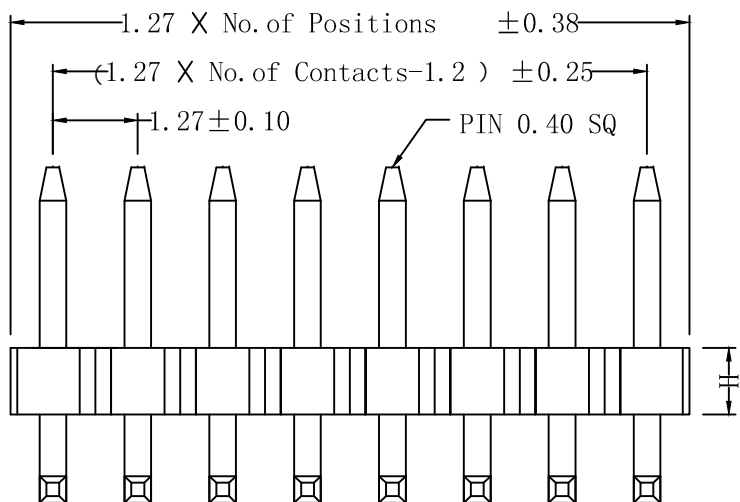

Ordering Information

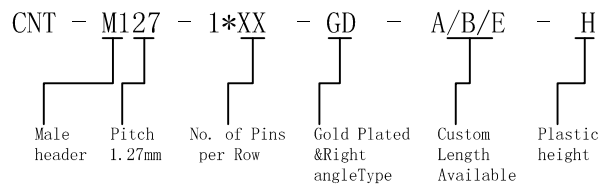

Recommended P.C. Board Hole Layout



A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL	TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE 1.27 Pin Header Single Row Right Angle Type
			X.°	±5°	X.	±0.30	董道丽	
REV.	UNIT	SCALE	.X°	±3°	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX°	±2°	王芳芳	20190321	CNT-M127-1*XX-GD-A/B/E-H	
			.XXX°	±1°	APPROVE	DATE		
					王元中	20190321		