

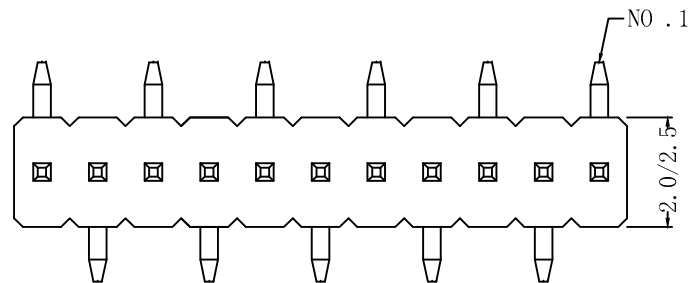


REV	DESCRIPTION	DATE

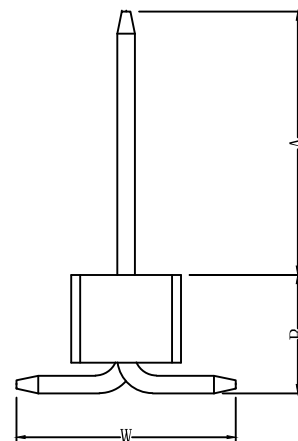

Type 1

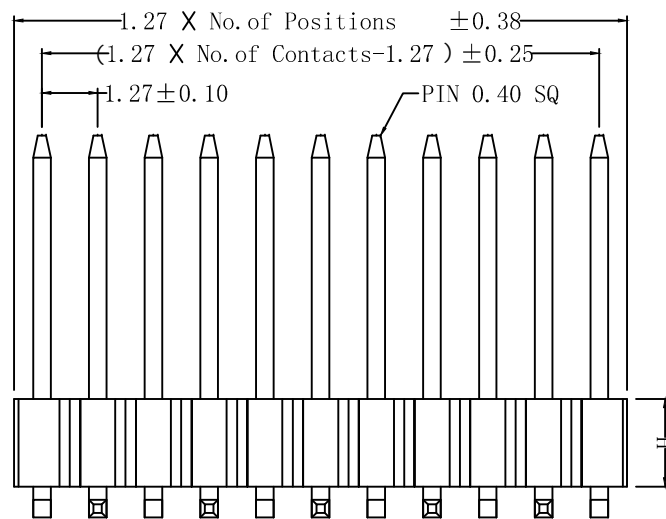


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C


MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

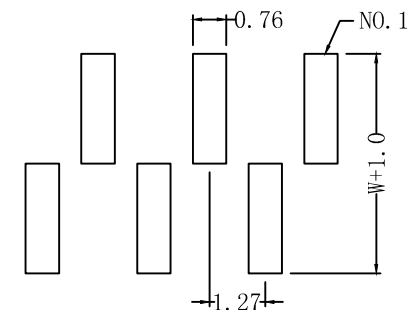

Ordering Information

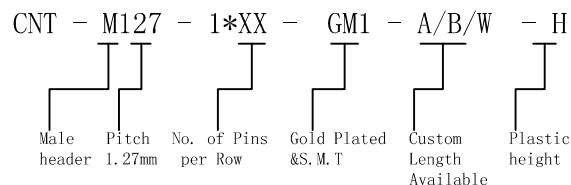

A	E
B	F
H	W

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20190321		
.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.					
.XX° ±2° .XX ±0.25	王芳芳	20190321						
.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-M127-1*xx-GM1-A/B					
王元中	20190321							