


REV	DESCRIPTION	DATE

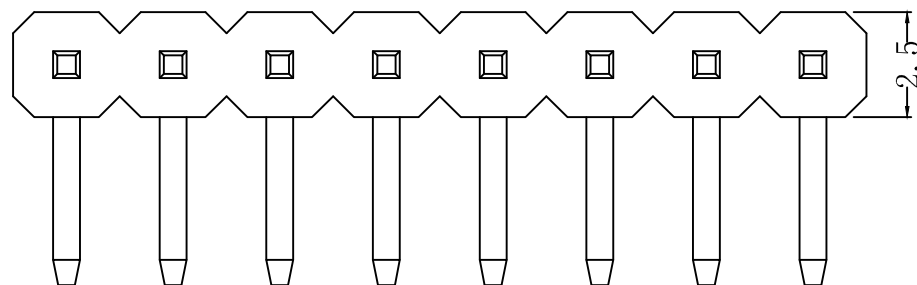



D Type

SPECIFICATIONS


Current Rating:3.0 Amps
 Insulator resistance:1000MΩ Min.
 Dielectric withstanding:AC 600V
 Contact Resistance:20 mΩ Max
 Operating Temperature:-40° C - +105° C

MATERIALS

Contact Material:Copper Alloy
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish:Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

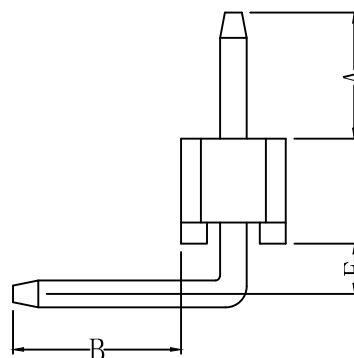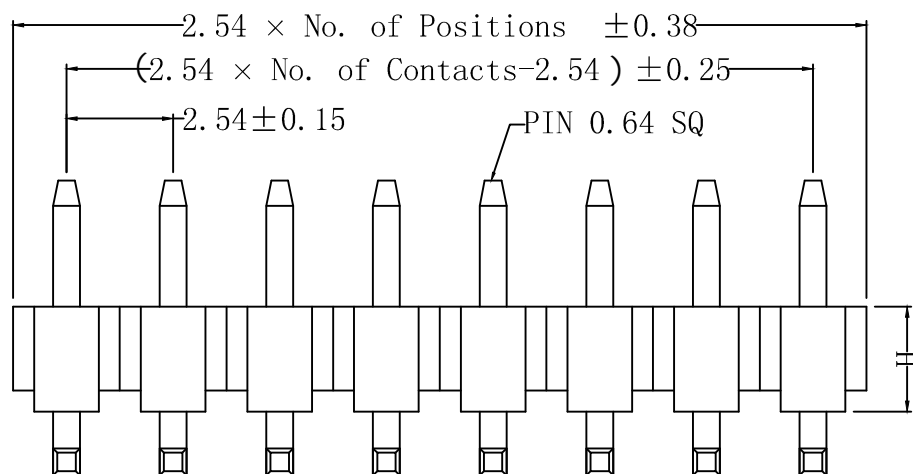

Recommended P. C. Board Hole Layout

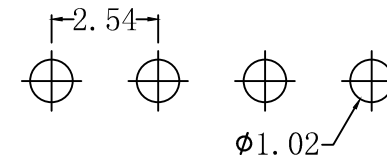

Ordering Information

CNT - M254 - 1*XX - GD - A/B/E - H

Male header Pitch 2.54mm No. of Pins per Row Gold Plated & Right angleType Custom Length Available Plastic height

A	E
B	F
H	W

CNT 肯耐特电子有限公司

REV. 1.0				UNIT mm	SCALE 1:1	GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE
						X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	2.54mm Pin Header Single Row Right Angle
						.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20190321	CNT-M254-1*XX-GD-A/B/E-H	
						.XX° ±2°	.XX ±0.25				
						.XXX° ±1°	.XXX ±0.15				