


REV	DESCRIPTION	DATE

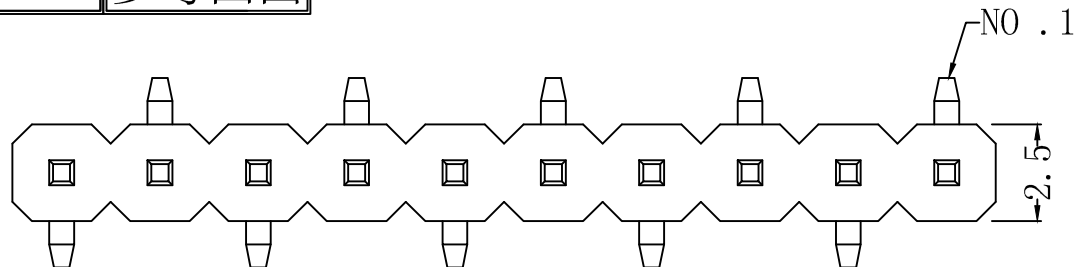



Type 1

SPECIFICATIONS


Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

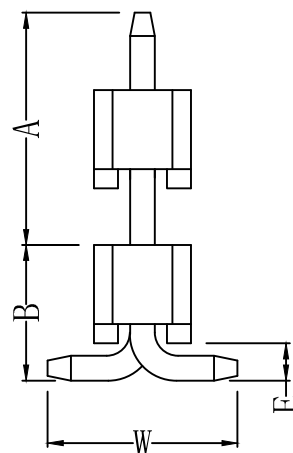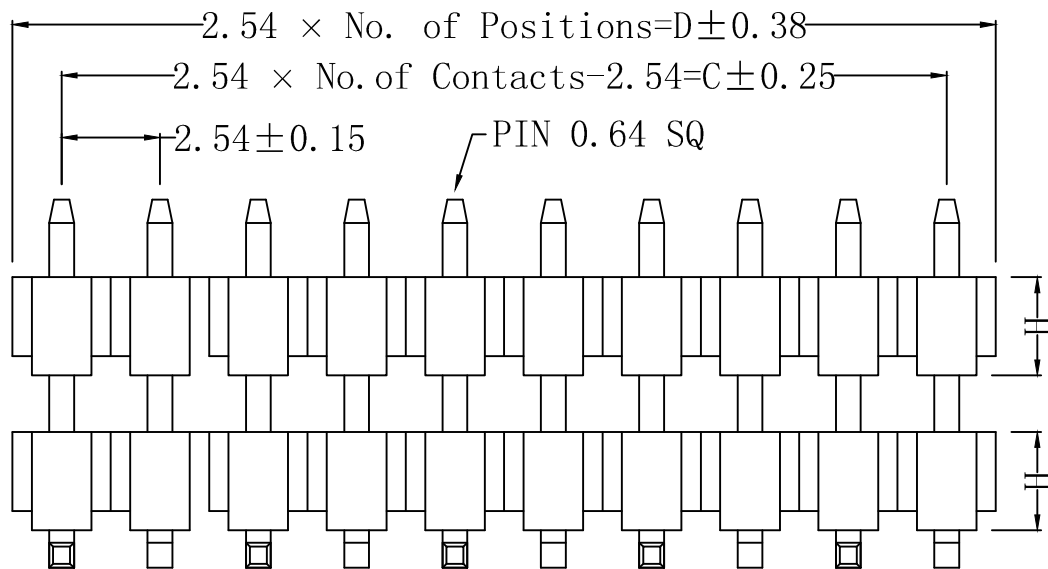

Recommended P. C. Board Hole Layout

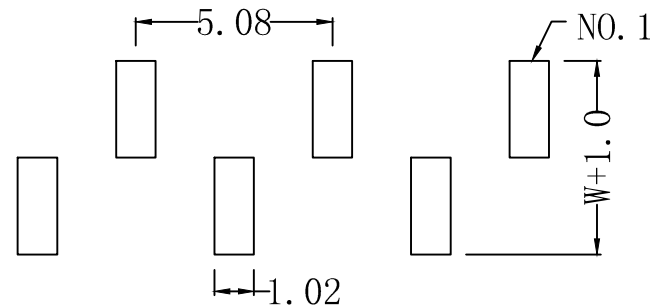

Ordering Information

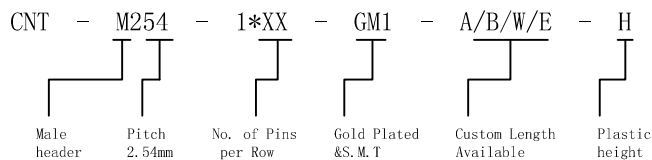

A	E
B	F
H	W

CNT 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV. 1.0			.X° ±3°		CHECK	DATE	PART. NO.	2.54mm Pin Header Single Row SMT
			.XX° ±2°	.X ±0.38	王芳芳	20190321		
UNIT mm			.XXX° ±1°		APPROVE	DATE	CNT-M254-1*XX-GM1-A/B/W/E-H	
SCALE 1:1					王元中	20190321		