
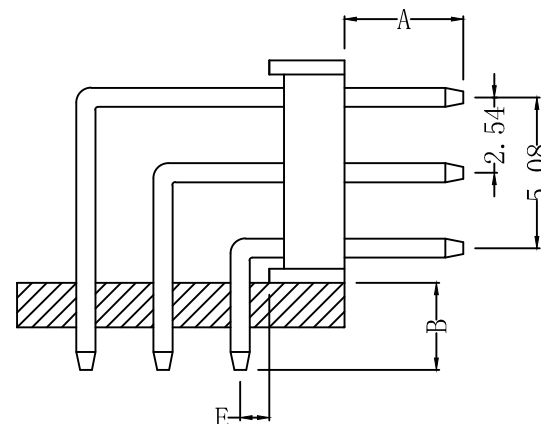
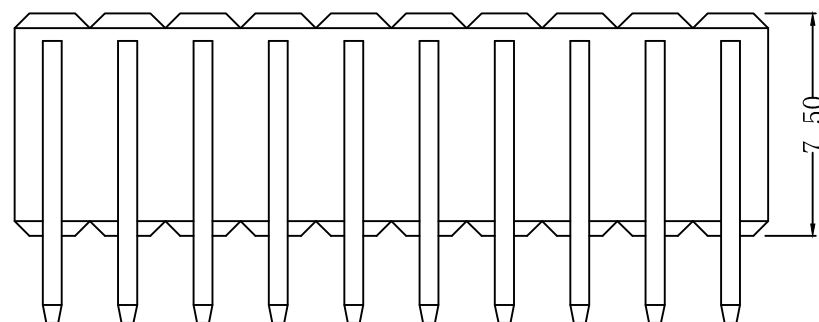


REV	DESCRIPTION	DATE

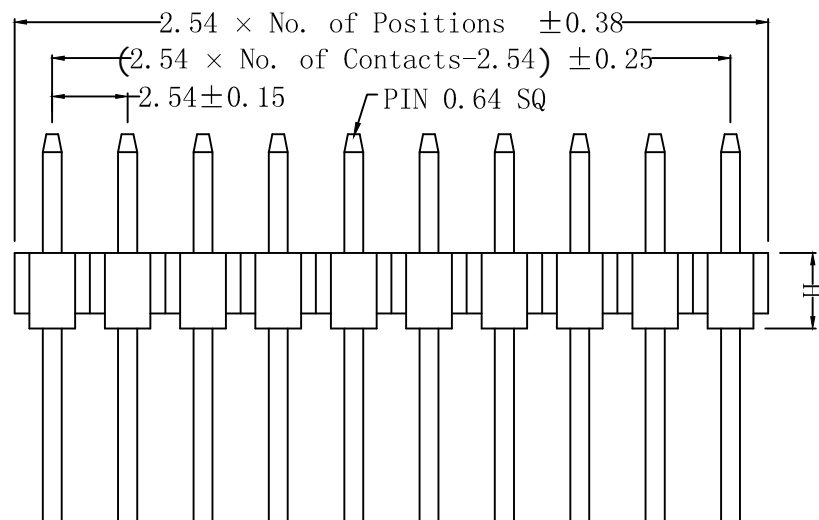


### SPECIFICATIONS

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

### Recommended P. C. Board Hole Layout

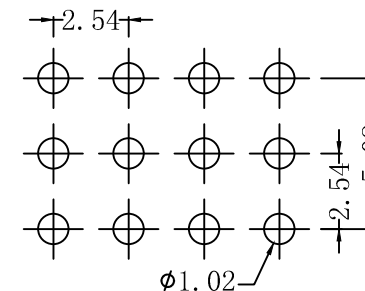

### Ordering Information

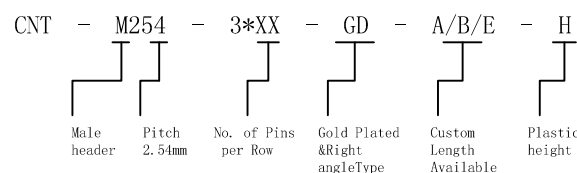

A	E
B	F
H	2.54

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321	PART. NO.	
.X° ±3°	.X ±0.38	CHECK	DATE	CNT-M254-3*XX-GD-A/B/E-H				
.XX° ±2°	.XX ±0.25	王芳芳	20190321					
REV. 1.0	UNIT mm	SCALE 1:1	.XXX° ±1°	.XXX ±0.15	APPROVE	DATE		
					王元中	20190321		