
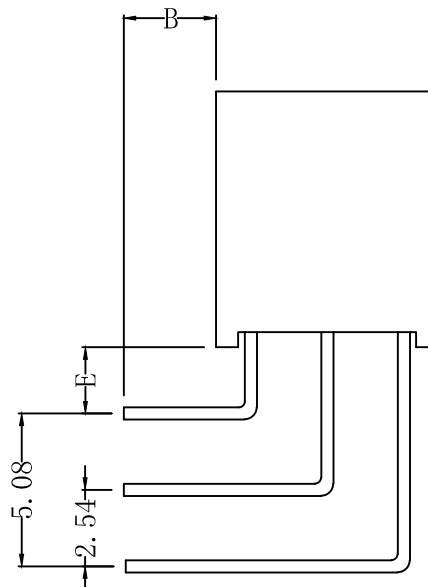
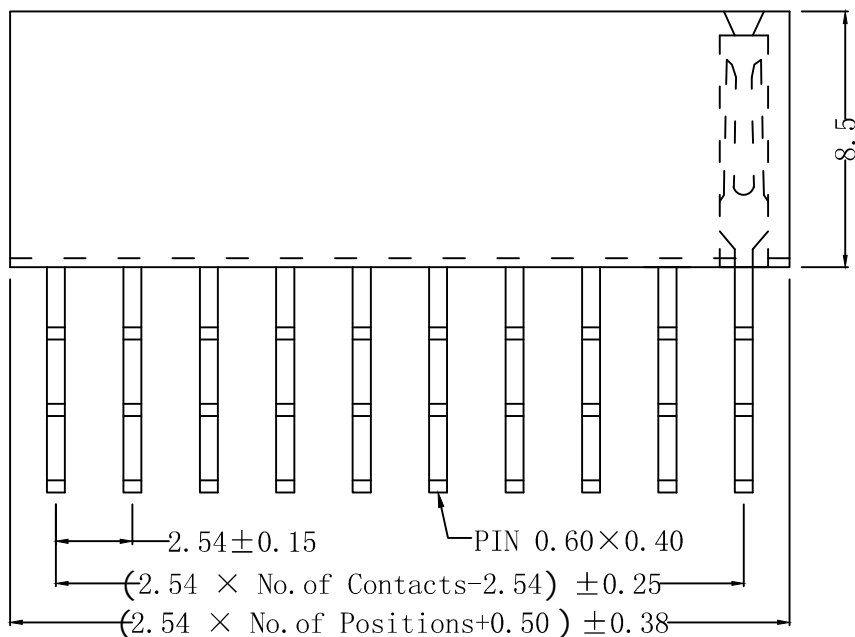


REV	DESCRIPTION	DATE

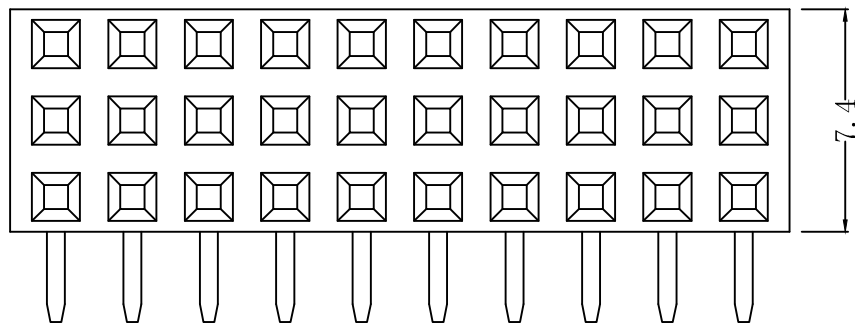


SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: Thermoplastic, UL 94V-0 PBT
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

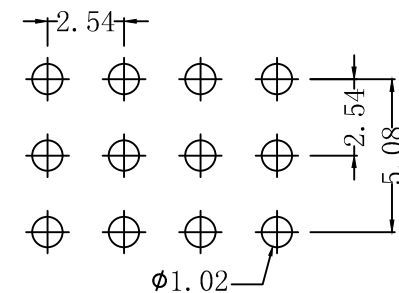

Ordering Information

CNT - F254 - 3*XX - GD - H - B/E - Y
 Female header Pitch 2.54mm No. of Pins per Row Gold Plated & Right angle Type Custom Length Available

A	E
B	F
H	W

CNT 肯耐特电子有限公司 REV. 1.0 UNIT mm SCALE 1:1	GENERAL TOLERANCE	DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 2.54*2.54 Female Header Triple Row Right Angle CNT-F254-3*xx-GD-H/B/E-Y
	.X° ±5° .X ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	
	.XX° ±3° .X ±0.38	APPROVE 王元中	DATE 20190321		
	.XX° ±2° .XX ±0.25				
	.XXX° ±1° .XXX ±0.15				