
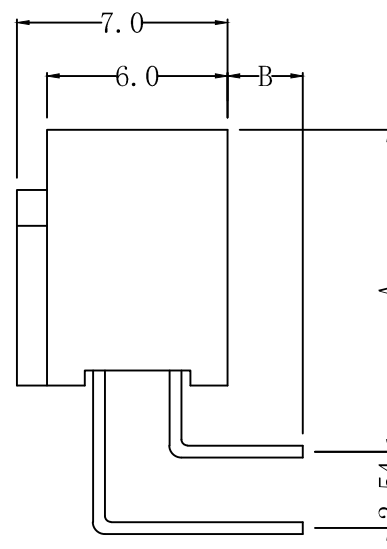
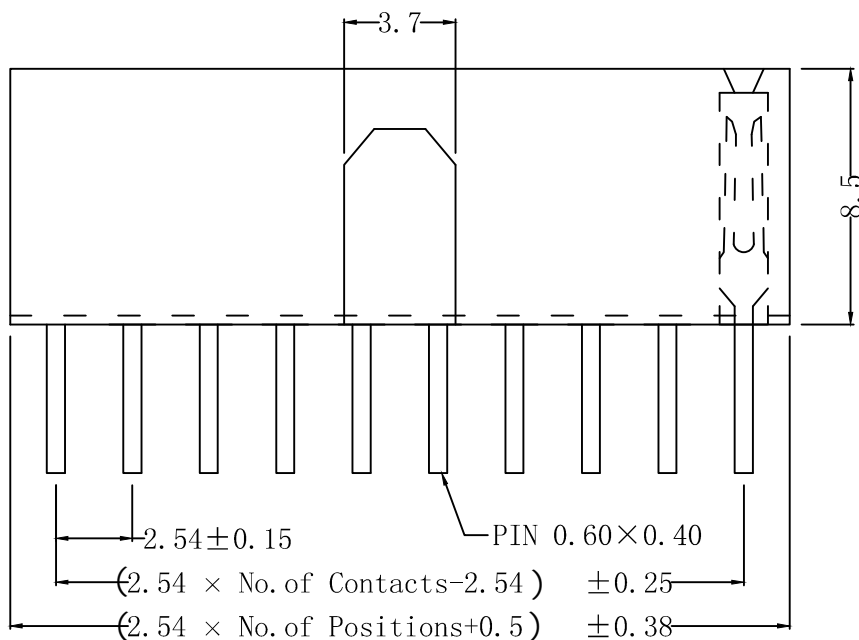


REV	DESCRIPTION	DATE

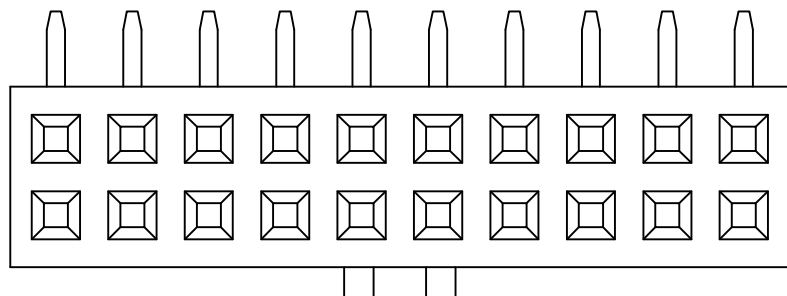

SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: Thermoplastic, UL 94V-0 PBT
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements


Ordering Information

A	E
B	F
H	W

CNT - F254 - 2*XX - GD - H/B - T

Female header Pitch 2.54mm No. of Pins per Row Gold Plated & Right angle type Available Custom Length

Recommended P. C. Board Hole Layout



REV. 1.0	UNIT mm	SCALE 1:1		GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE 2.54*2.54 Female Header Dual Row Right Angle CNT-F254-2*xx-GD-H/B-T
				X.° ±5°	X. ±0.30	董道丽	20190321		
				.X° ±3°	.X ±0.38	王芳芳	20190321		
				.XX° ±2°	.XX ±0.25	王元中	20190321		
				.XXX° ±1°	.XXX ±0.15	APPROVE	DATE	PART. NO.	