
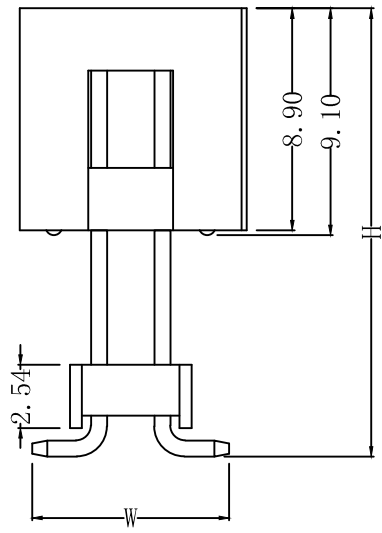
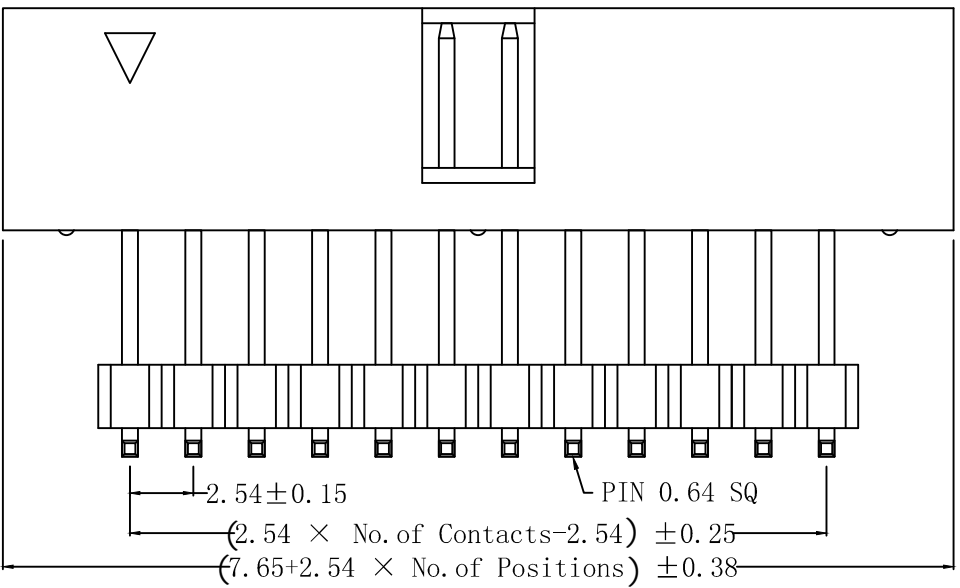


REV	DESCRIPTION	DATE

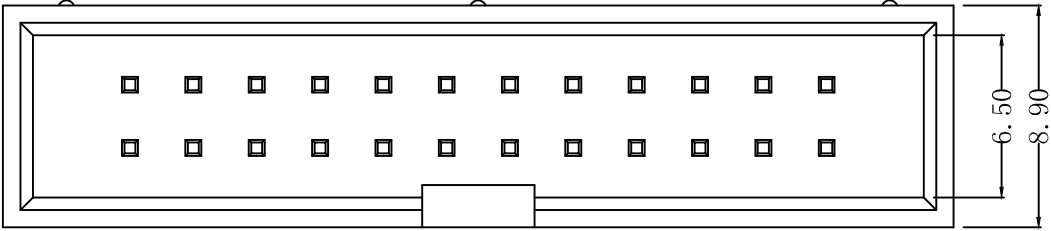


**SPECIFICATIONS**

Current Rating: 3.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 600V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C


**MATERIALS**

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickel  
 All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout



Ordering Information

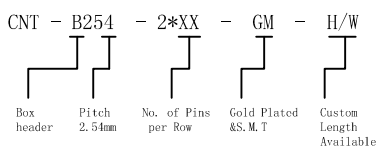

A		E	
B		F	
H		W	

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1		.XX° ±2°	.XX ±0.25	王芳芳	20190321		
				.XXX° ±1°	.XXX ±0.15	王元中	20190321	CNT-B254-2*xx-GM-H/W	
<p>2.54mm Box Header SMT</p>									