
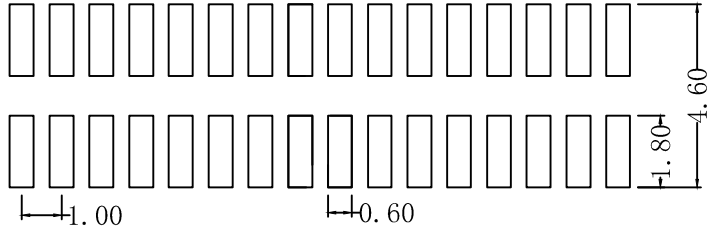

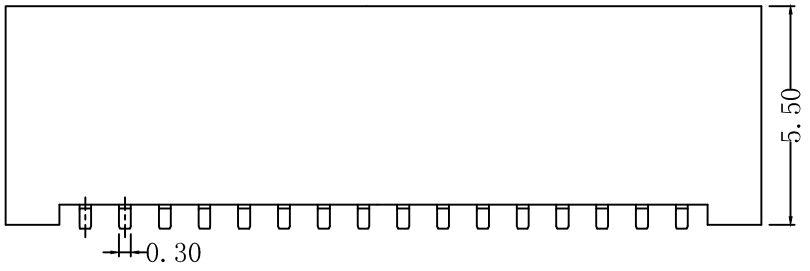


REV	DESCRIPTION	DATE

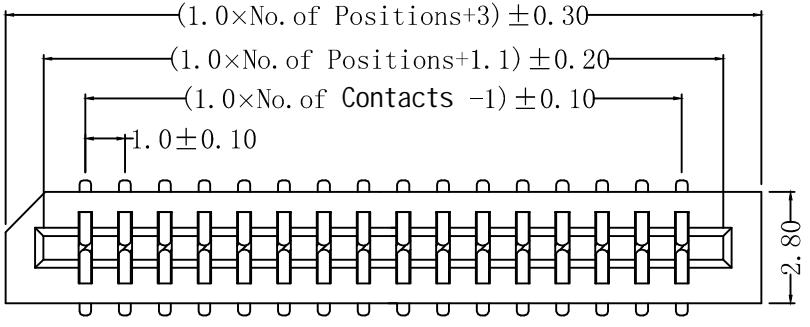

NOTE:

- MATERIAL
  - HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
  - CONTACT: COPPER ALLOY.
  - PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL
  - CURRENT RATING: 1.0 AMP.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
  - INSULATION RESISTANCE: 500MΩ MIN.
  - CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C TO 85°C.
- PART NO.
  - CNT-FPC100-XX-TSM-D0-550

RECOMMENDED PCB LAYOUT

<p><b>CNT</b> 肯耐特电子有限公司</p>			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20191011		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20191011	CNT-FPC100-XX-TSM-D0-550	FPC 1.0 PITCH CONNECTOR TOP ENTRY DUAL SMT TYPE
			.XXX° ±1°	.XXX ±0.15	王元中	20191011		