


REV	DESCRIPTION	DATE

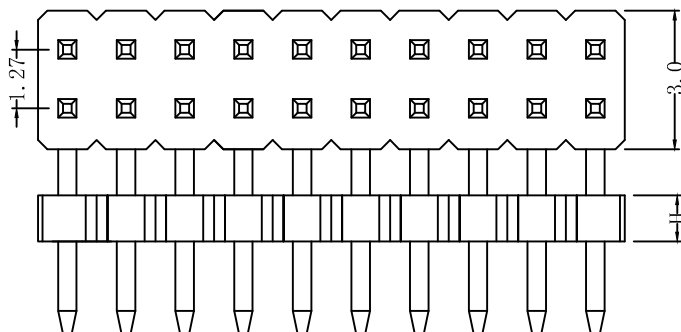



D2 Type

SPECIFICATIONS


Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

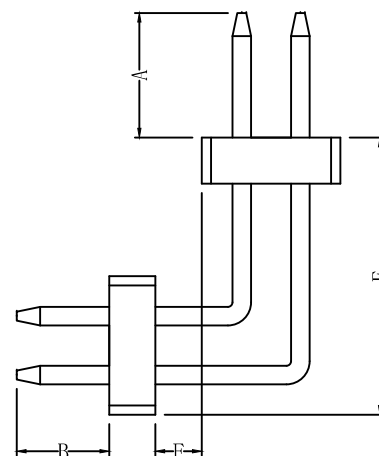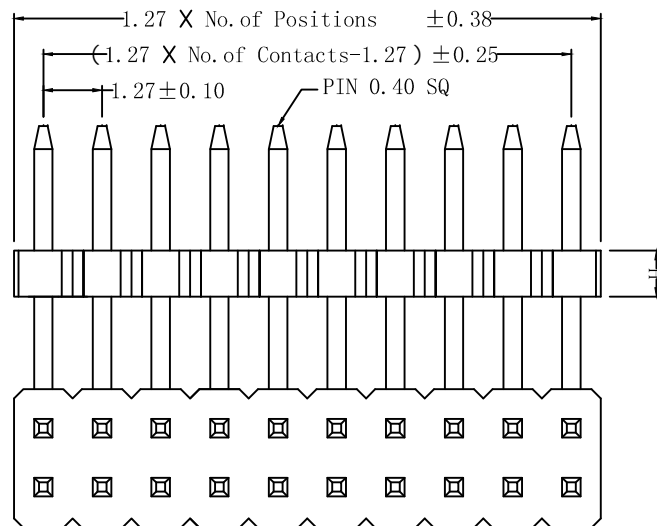

Recommended P. C. Board Hole Layout



Ordering Information

CNT - M127 - 2*XX - GD2 - A/B/E/F - H

Male header Pitch 1.27mm No. of Pins per Row Gold Plated & Right angle type Custom Length Available Plastic height

A		E	
B		F	
H	1.0mm	W	

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE	GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
1.0	mm	1:1	X.° ±5° X. ±0.30	董道丽	20190321		1.27*1.27 Pin Header Dual Row Right Angle Dip Type
			.X° ±3° .X ±0.38	王芳芳	20190321	PART. NO.	
			.XX° ±2° .XX ±0.25	王元中	20190321	CNT-M127-2*XX-GD2-A/B/E/F-H	
			.XXX° ±1° .XXX ±0.15				