


REV	DESCRIPTION	DATE

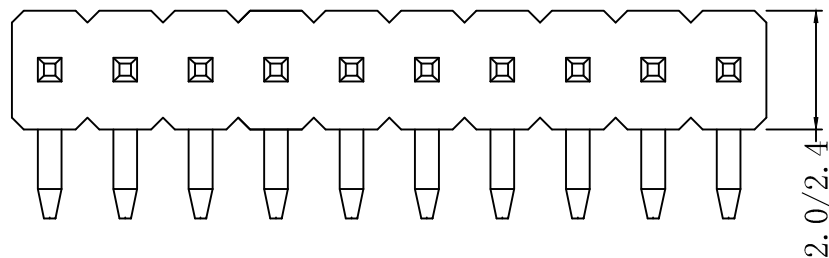



D1 Type

SPECIFICATIONS


Current Rating:1.0 Amps  
 Insulator resistance:1000MΩ Min.  
 Dielectric withstanding:AC 300 V  
 Contact Resistance:20 mΩ Max  
 Operating Temperature:-40° C - +105° C

MATERIALS


Contact Material:Copper Alloy  
 Insulator Material:High Temperature Thermoplastic,UL 94V-0 Nylon  
 Finish:Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

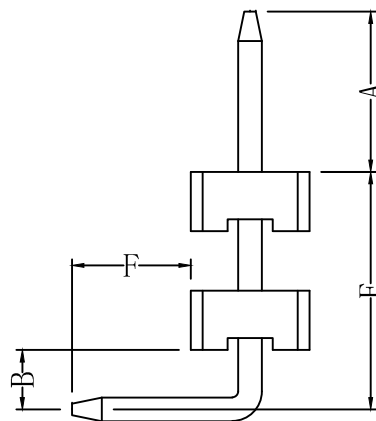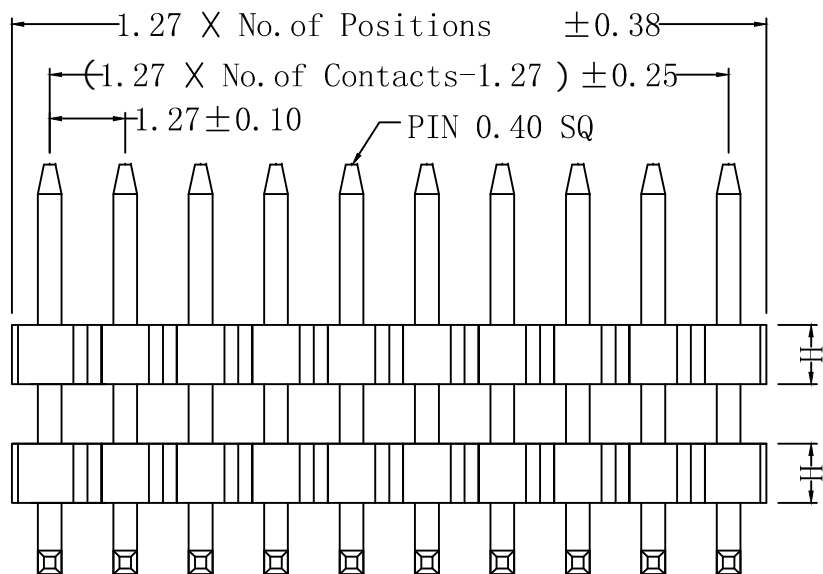

Recommended P.C. Board Hole Layout



Ordering Information

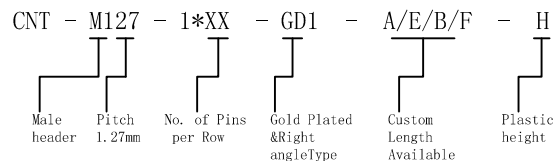

A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司			GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	董道丽	20190321		
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°	.XX ±0.25	王芳芳	20190321	CNT-M127-1*XX-GD1-A/E/B/F-H	
			.XXX° ±1°	.XXX ±0.15	王元中	20190321		1.27 Pin Header Single Row Right Angle Type