
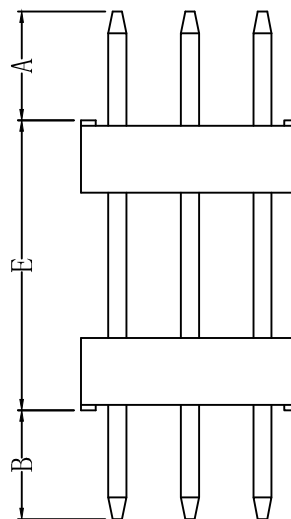
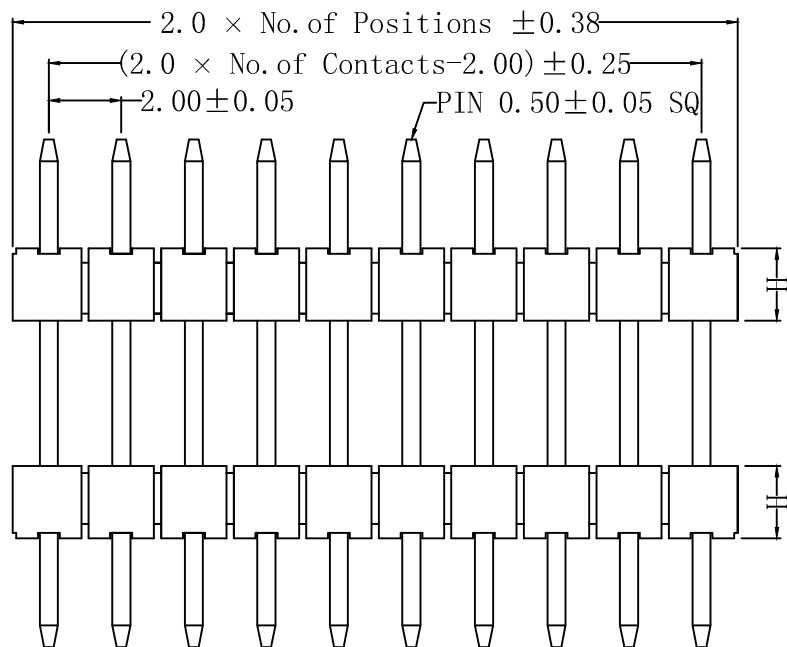


REV	DESCRIPTION	DATE

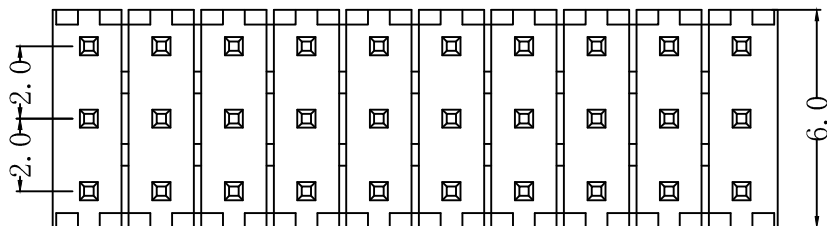


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickel
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

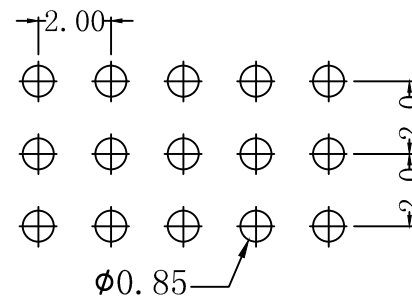

Ordering Information

CNT - M200 - 3*XX - GS - A/E/B - H

Male header Pitch 2.00mm No. of Pins per Row Gold Plated & Straight Custom Length Available Plastic height

A	3.0	E	16.0
B	3.0	F	
H	2.0	W	

CNT 肯耐特电子有限公司 REV. 1.0 UNIT mm SCALE 1:1	GENERAL	TOLERANCE	DRAWN	董道丽	DATE	20210114	DWG. NO.	TITLE 2.0mm Pin Header Triple Row Straight Type
	.X° ±5°	.X ±0.30	CHECK	王芳芳	DATE	20210114	20210114002	
	.XX° ±2°	.XX ±0.25	APPROVE	王元中	DATE	20210114	CNT-M200-3*XX-GS-A/E/B-H	
	.XXX° ±1°	.XXX ±0.15						