
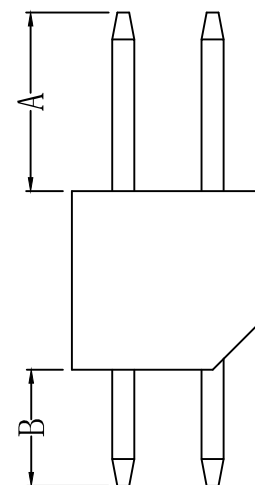
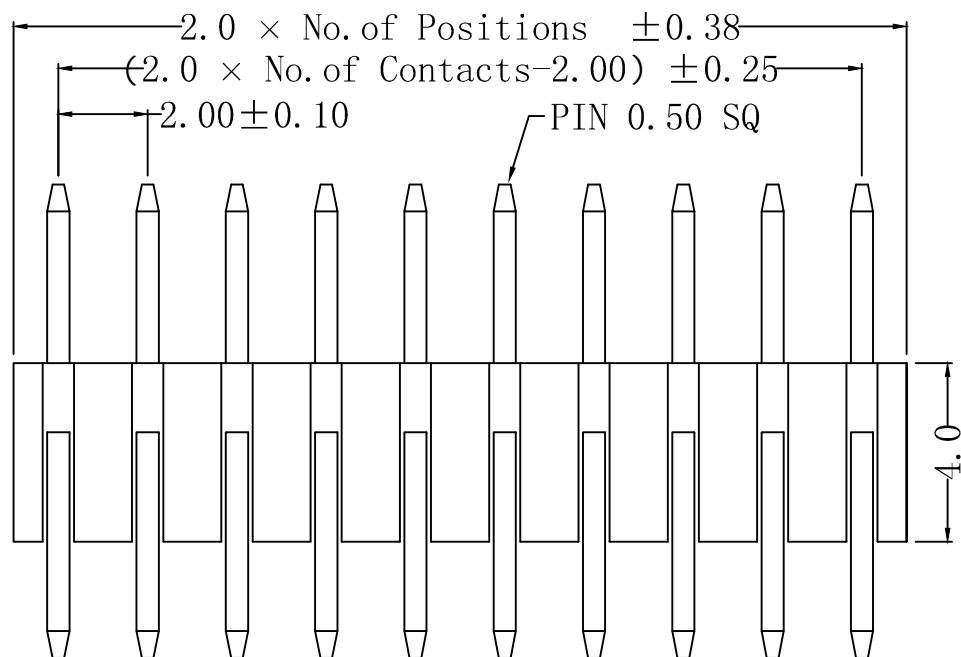


REV	DESCRIPTION	DATE

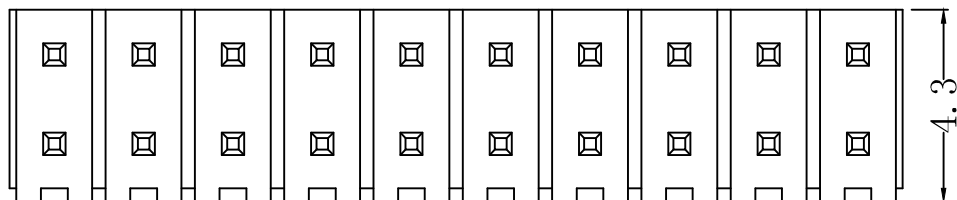


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

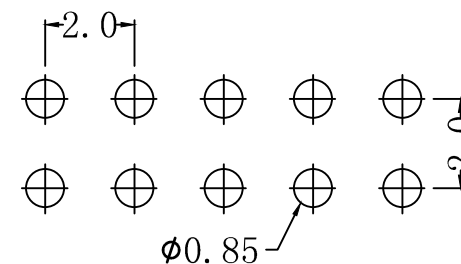

Ordering Information

CNT - M200 - 2*XX - GS - A/B - H

Male header Pitch 2.00mm No. of Pins per Row Gold Plated & Straight Custom Length Available Plastic height

A		E	
B		F	
H	4.0	W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE 2.0mm Pin Header Dual Row H:4.3mm Straight Type
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20190321	PART. NO.	
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20190321	CNT-M200-2*XX-GS-A/B-H	
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						