
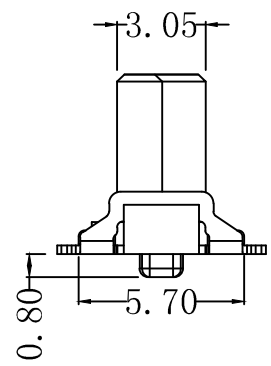


REV	DESCRIPTION	DATE

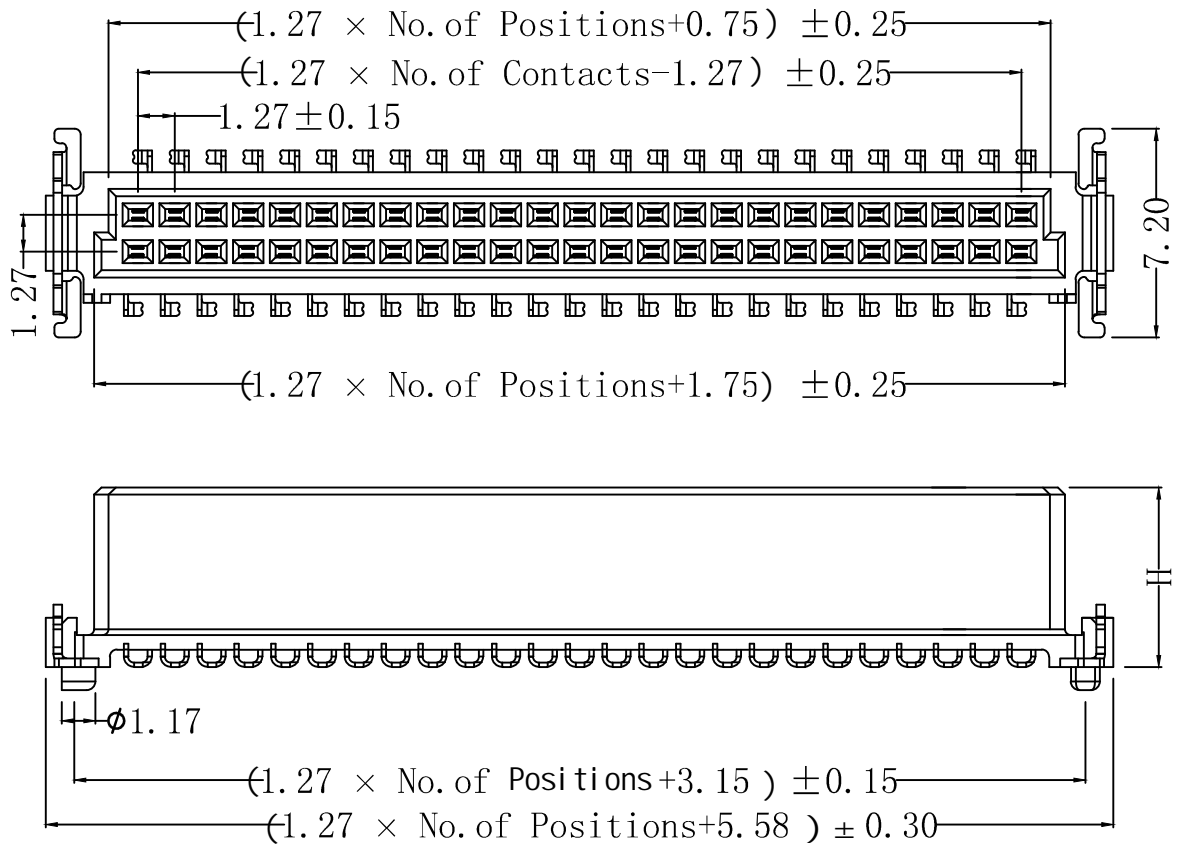


SPECIFICATIONS

Current Rating: 0.8 Amp
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: 500VAC
 Contact Resistance: 30 mΩ Max
 Operating Temperature: -55°C - +125°C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 Colour: Black
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

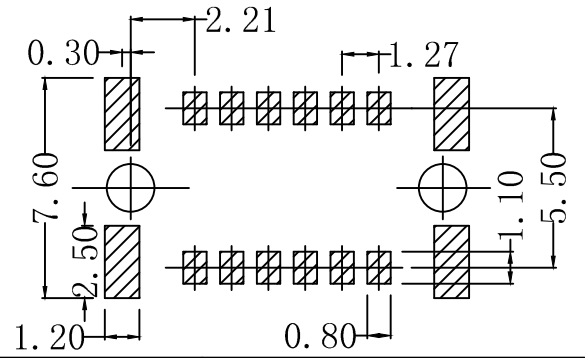

A	E
B	F
H	W

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
<p>REV. 1.0 UNIT mm SCALE 1:1</p>				.X° ±3°		CHECK	DATE	PART. NO.	Pitch 1.27 Female Connector SMC Type-B SMT Type
				.XX° ±2°	.XX ±0.25	王芳芳	20190321		
				.XXX° ±1°		APPROVE	DATE		
				.XXX ±0.15	王元中	20190321		CNT-F127-2*xx-GM-H-5.7	