


REV	DESCRIPTION	DATE

The polarization and The Big Post will be thd same side.

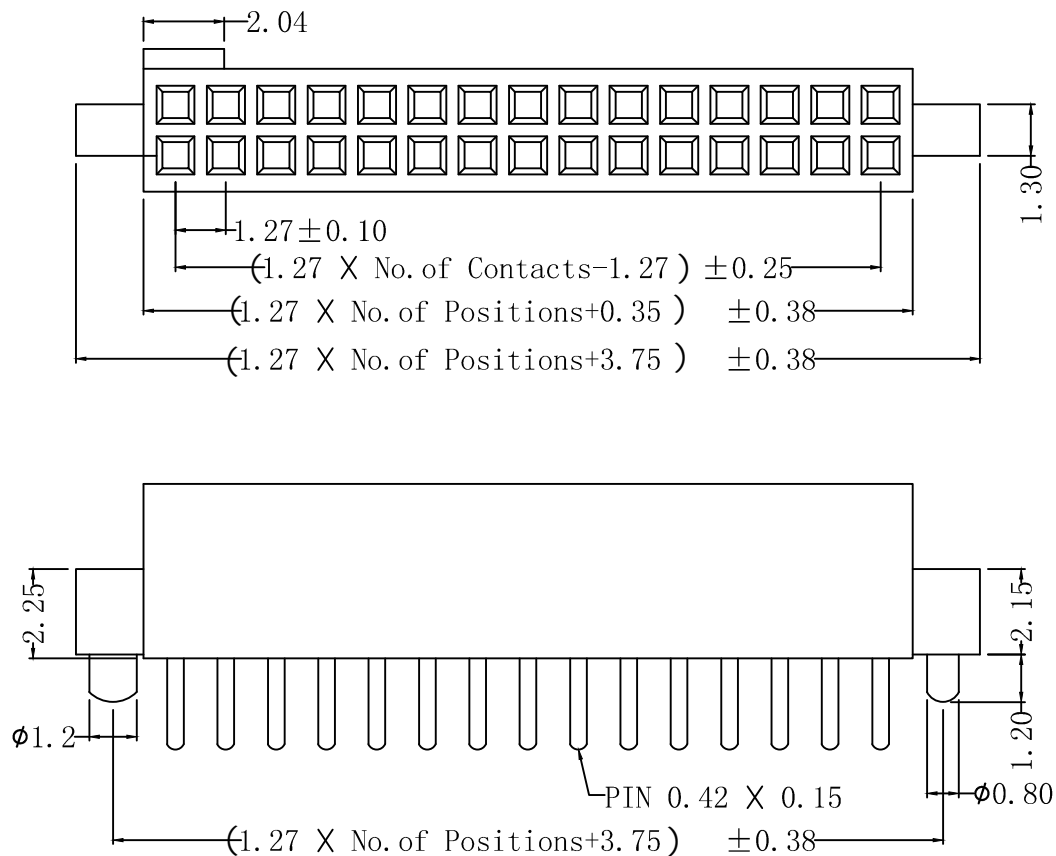


SPECIFICATIONS

Current Rating: 1.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 300 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements


Recommended P.C. Board
 Hole Layout

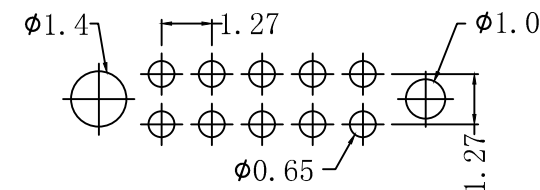

Ordering Information

CNT - F127 - 2*XX - GS - H - P - T

A	E
B	F
H	W

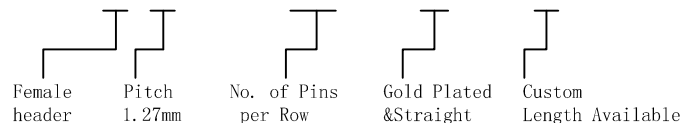

CNT 肯耐特电子有限公司			GENERAL TOLERANCE	DRAWN	董道丽	DATE	20190321	DWG. NO.	TITLE
			X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20190321	
REV.	UNIT	SCALE	.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20190321	CNT-F127-2*XX-GS-440/2.3-P-T
1.0	mm	1:1	.XX° ±2°	.XX ±0.25					1.27*1.27 Female Header With Local Peg Straight Type
			.XXX° ±1°	.XXX ±0.15					