


REV	DESCRIPTION	DATE


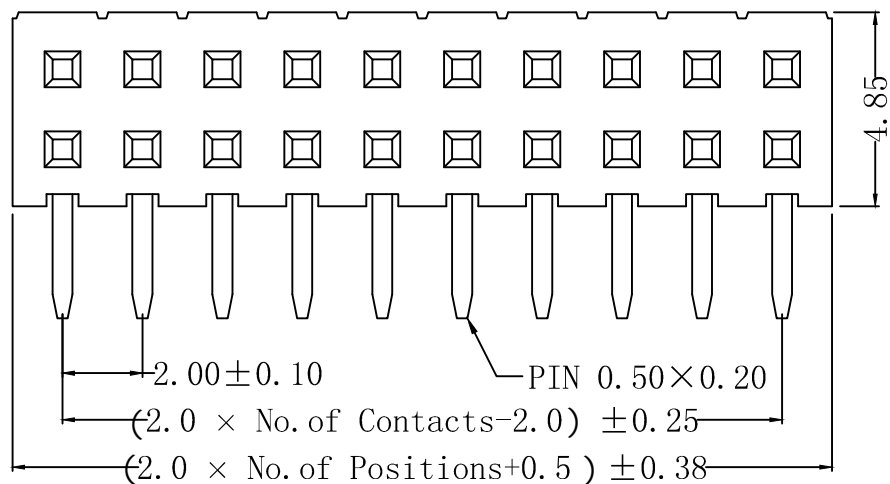


### SPECIFICATIONS


Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

### MATERIALS

Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

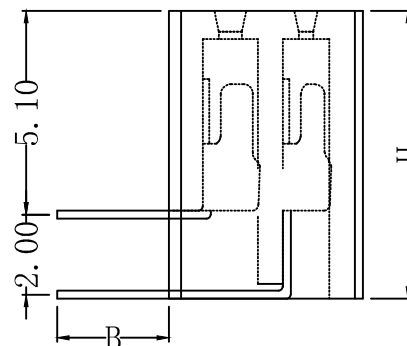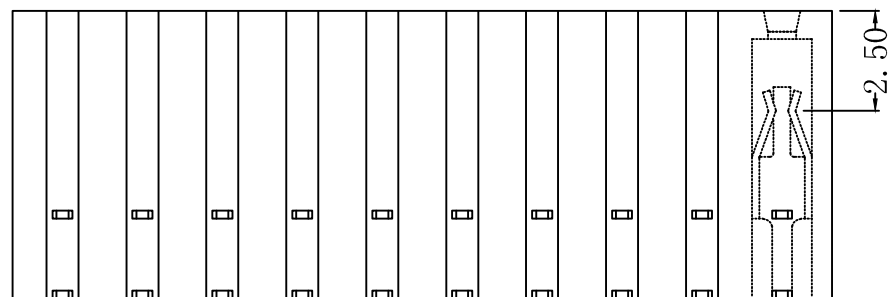


Recommended P.C. Board Hole Layout

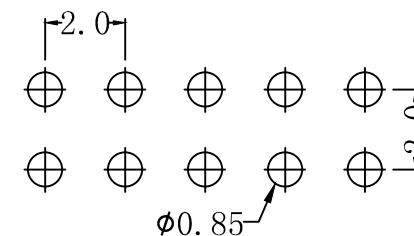

### Ordering Information

CNT - F200 - 2\*XX - GD - H - B

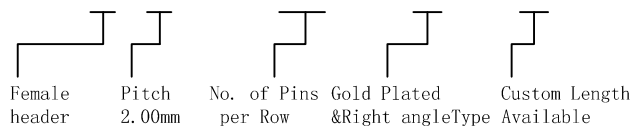

A	E
B	F
H	W

<b>CNT</b> 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20190321		
REV. 1.0				SCALE 1:1		CHECK	DATE	PART. NO.	2.00mm Female Header Side Entry Right Angle Type
				UNIT mm		.X° ±3°	.X ±0.38	王芳芳	
SCALE 1:1				.XX° ±2°		APPROVE	DATE	CNT-F200-2*xx-GD-H-B	
				.XXX° ±1°		.XXX ±0.15	王元中		