
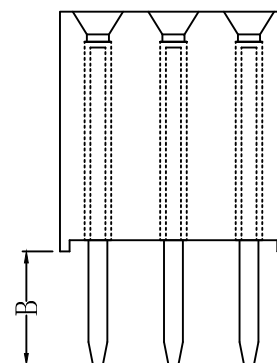
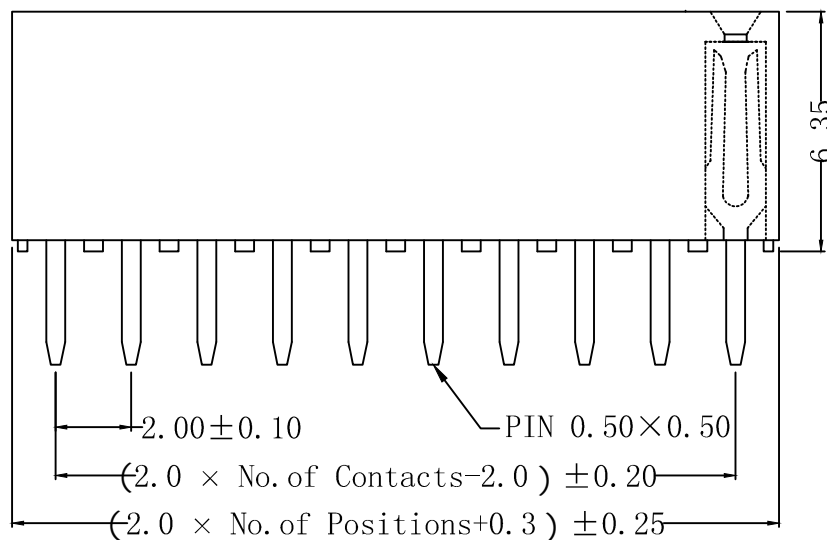


REV	DESCRIPTION	DATE

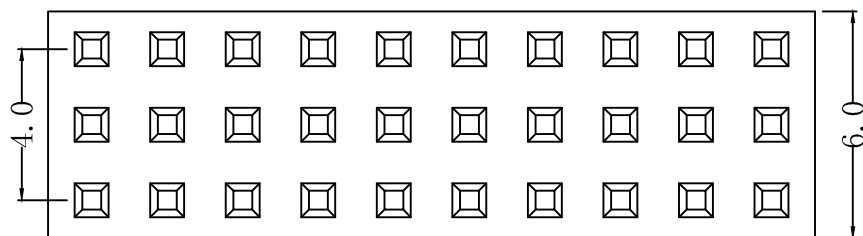


SPECIFICATIONS

Current Rating: 2.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 500V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Copper Alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P.C. Board Hole Layout

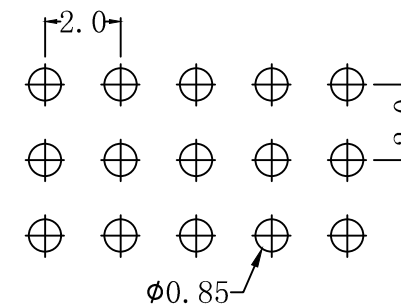

Ordering Information

CNT - F200 - 3*XX - GS - H/B

Female header Pitch 2.00mm No. of Pins per Row Gold Plated & Straight Custom Length Available

A		E	
B		F	
H		W	

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE 2.00mm Female Header Triple Row Straight Type
				X.° ±5°	X. ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3°	.X ±0.38	APPROVE 王元中	DATE 20190321	CNT-F200-3*XX-GS-635/B	
				.XX° ±2°	.XX ±0.25				
				.XXX° ±1°	.XXX ±0.15				