
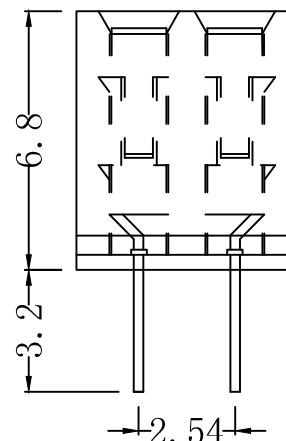
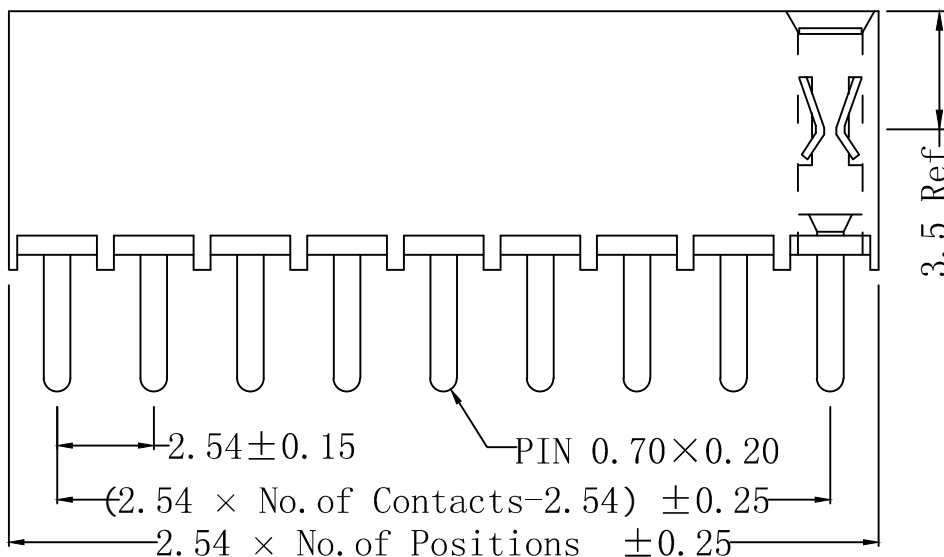


REV	DESCRIPTION	DATE

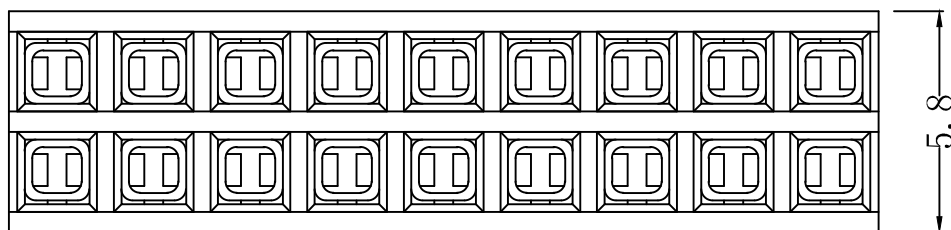


SPECIFICATIONS

Current Rating: 3.0 Amps
 Insulator resistance: 1000MΩ Min.
 Dielectric withstanding: AC 600V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy
 Insulator Material: Thermoplastic, UL 94V-0 PBT
 Finish: Gold/Tin Plated over Nickle
 All materials must meet RoHS requirements

Recommended P. C. Board Hole Layout

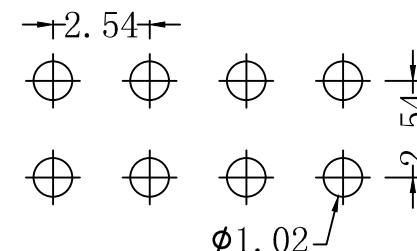

Ordering Information

CNT - F254 - 2*XX - GS - 6.8/3.2 - □



A		E	
B		F	
H	6.8	W	

CNT 肯耐特电子有限公司		GENERAL TOLERANCE		DRAWN	董道丽	DATE	20190426	DWG. NO.		TITLE 2.54*2.54 Female Header Dual Row Straight Type
		X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20190426	PART. NO.		
REV.	UNIT	SCALE		APPROVE	王元中	DATE	20190426	CNT-F254-2*XX-GS-6.8/3.2-□		
1.0	mm	1:1								