


REV	DESCRIPTION	DATE


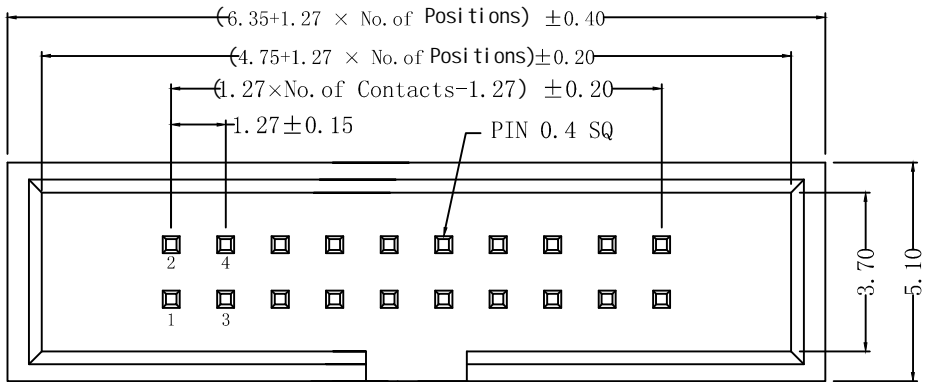


**SPECIFICATIONS**


Current Rating:1.0 Amps  
 Insulator resistance:1000MΩ Min.  
 Dielectric withstanding:AC 300 V  
 Contact Resistance:20 mΩ Max  
 Operating Temperature:-40° C - +105° C

**MATERIALS**


Contact Material:Copper Alloy  
 Insulator Material:High Temperature Thermoplastic,UL 94V-0 Nylon  
 Finish:Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

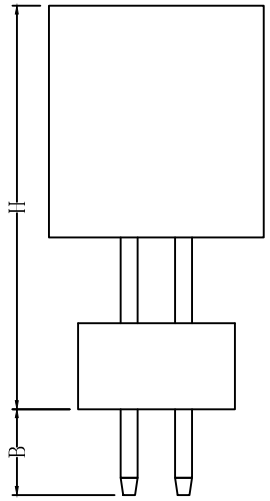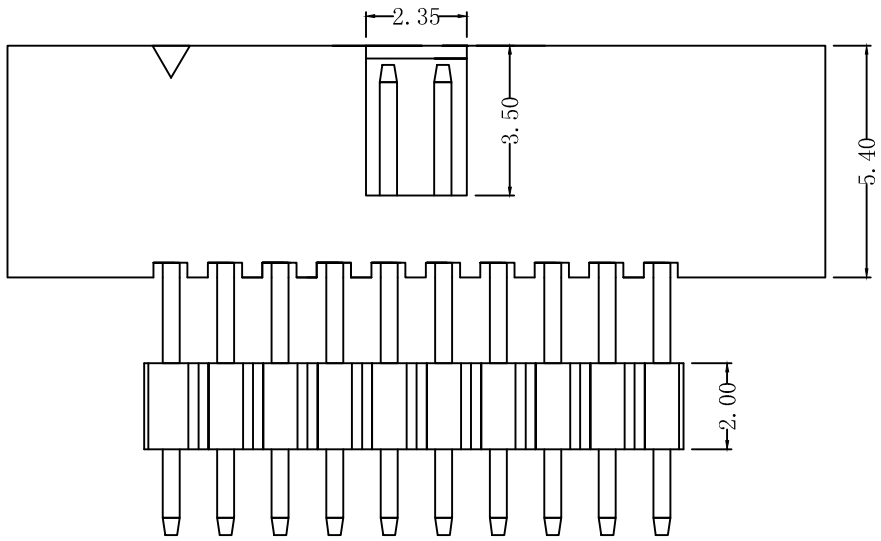

**Ordering Information**

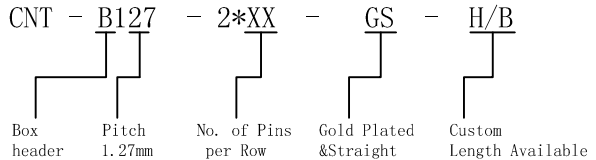

**Recommended P. C. Board Hole Layout**



A		E	
B	2.3	F	
H	5.4	W	

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	董道丽	20190819		
<p>REV. 1.0 UNIT mm SCALE 1:1</p>				.X° ±3° .X ±0.38	CHECK	DATE	PART. NO.	1.27mm Box Heade Straight
				.XX° ±2° .XX ±0.25	王芳芳	20190819		
				.XXX° ±1° .XXX ±0.15	APPROVE	DATE	CNT-B127-2*XX-GS-H/B	
				王元中	20190819			